
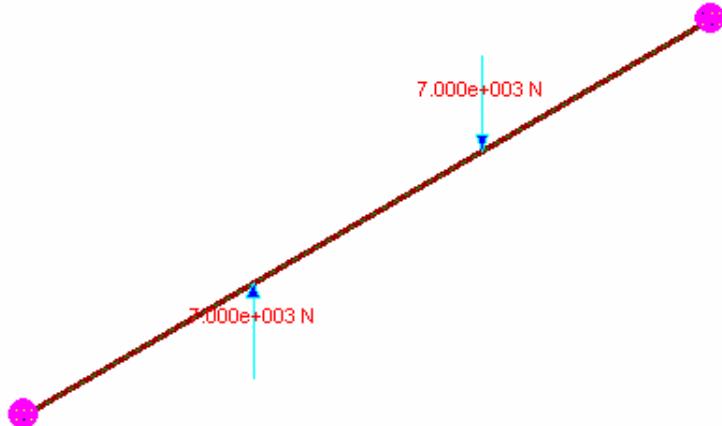


<b>TEST SCHEDULE CASTALIA_STAT025BIS</b>		<b>SOLVING</b>	<b>BEAM PROBLEM</b>	<b>SOL.SAR.STAT025BIS</b>
<b>FINITE ELEMENT</b>			<b>SOLVER</b>	<b>CLEVER (SARGON ©)</b>



#### Problem description:

Simply supported beam with two shear forces

**Keywords (english):** validation, benchmark, statics, finite elements, fem, solver, precision, reliability, quality control, beam, error measure

**Keywords (italian):** validazione, benchmark, statica, elementi finiti, fem, solutore, precisione, affidabilità, controllo qualità, travi, misura di errore

#### Editorial note:

Target values are based on theoretical values, cross check values or accepted values. Where "theoretical" values are used, target values have been computed using well known formulae and/or published results.

#### Note:

Shear area is not used, that is shear energy neglected.  $Dxi$  and  $Dzi$  are the offsets from lower Z alignment leftmost available node.

<b>TEST SCHEDULE CASTALIA_STAT025BIS</b>		<b>SOLVING</b>	<b>BEAM PROBLEM</b>	<b>SOL.SAR.STAT025BIS</b>
<b>FINITE ELEMENT</b>			<b>SOLVER</b>	<b>CLEVER (SARGON ©)</b>

<b>GEOMETRY &amp; CONSTRAINTS</b>					
Full Length [mm]	Dx1 [mm]	Dx2 [mm]			Constraints
3000	1000	2000	-		As shown
<b>LOAD</b>					
Type		Value	Point of application		
force concentrated		7.000e+003	Dx1		
force concentrated		7.000e+003	Dx2		
			-		
			-		
MATERIAL	<b>Fe360</b>				
$f_y$ [N/mm <sup>2</sup> ]	$f_u$ [N/mm <sup>2</sup> ]	E [N/mm <sup>2</sup> ]	$\nu$	$\alpha$	
2.350e+002	3.600e+002	2.060e+005	3.000e-001	1.200e-005	
<b>CROSS-SECTION</b>					
A [mm <sup>2</sup> ]	J <sub>2</sub> [mm <sup>4</sup> ]	J <sub>3</sub> [mm <sup>4</sup> ]	J <sub>1</sub> [mm <sup>4</sup> ]	W <sub>2</sub> [mm <sup>3</sup> ]	W <sub>3</sub> [mm <sup>3</sup> ]
2.981e+003	2.051e+007	1.540e+006	6.254e+004	2.051e+005	3.081e+004
W <sub>pl2</sub> [mm <sup>3</sup> ]	W <sub>pl3</sub> [mm <sup>3</sup> ]	i <sub>2</sub> [mm]	i <sub>3</sub> [mm]	i <sub>t</sub> [mm]	
2.597e+005	4.776e+004	8.296e+001	2.273e+001	2.887e+001	
<b>OTHER DATA</b>					

<b>TARGET VALUES</b>		<b>vs</b>	<b>COMPUTED VALUES</b>		
Description	$T_v$	$T_{vK}$	$C_v$	$(C_v - T_v)$	$100 \frac{T_v - C_v}{C_v}$
Shear T3, I extreme. Beam # 1. Load case # 1	2.3333e+003	Th	2.3333e+003	<b>4.6700e-004</b>	<b>0.0000</b>
Shear T3, J extreme. Beam # 1. Load case # 1	-2.3333e+003	Th	-2.3333e+003	<b>-4.6700e-004</b>	<b>0.0000</b>
Bending M2, I extreme. Beam # 1. Load case # 1	0.0000e+000	Th	2.3283e-010	<b>2.3283e-010</b>	<b>0.0000</b>
Bending M2, J extreme. Beam # 1. Load case # 1	0.0000e+000	Th	0.0000e+000	<b>0.0000e+000</b>	<b>0.0000</b>

Cv                    computed value  
 Tv                    target value  
 T<sub>vK</sub>              target value kind (theoretical, cross check, accepted).  
     Th                theoretical value  
     Cr                cross check value (theoretical target value is not known, results obtained with a different program are used as target values).  
     Ac                accepted value (a value which, on the basis of some argument, can be considered acceptable).

100(T<sub>v</sub> - Cv) / Cv    relative error percentage

Computational notes:

**Authors:** Ing. Marco Croci, Ing. Paolo Rugarli  
**Computed errors:** checksolvers.exe, by Castalia srl.

