


<b>TEST SCHEDULE CASTALIA_STAT073BIS</b>		<b>SOLVING</b>	<b>BEAM PROBLEM</b>	<b>SOL.SAR.STAT073BIS</b>
<b>FINITE ELEMENT</b>			<b>SOLVER</b>	<b>CLEVER (SARGON ©)</b>

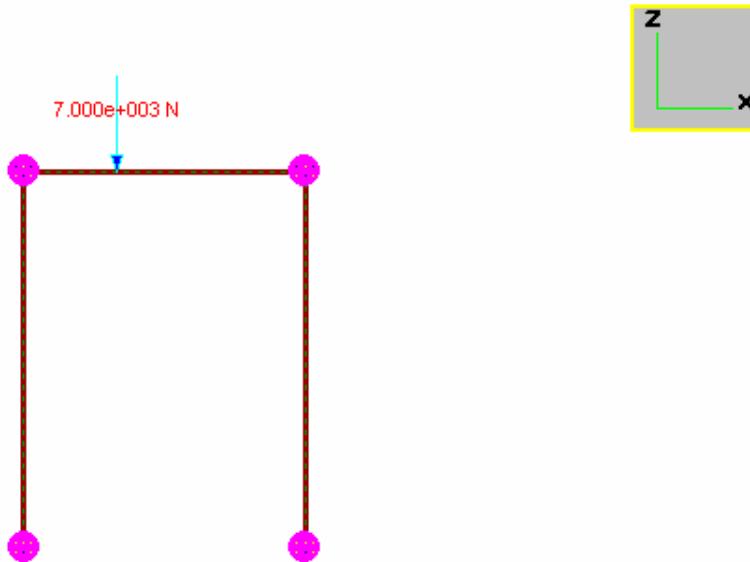

#### Problem description:

Hinged frame with shear force

**Keywords (english):** validation, benchmark, statics, finite elements, fem, solver, precision, reliability, quality control, beam, error measure

**Keywords (italian):** validazione, benchmark, statica, elementi finiti, fem, solutore, precisione, affidabilità, controllo qualità, travi, misura di errore

#### Editorial note:

Target values are based on theoretical values, cross check values or accepted values. Where "theoretical" values are used, target values have been computed using well known formulae and/or published results.

#### Note:

Shear area is not used, that is shear energy neglected.  $Dxi$  and  $Dzi$  are the offsets from lower Z alignment leftmost available node.

<b>TEST SCHEDULE CASTALIA_STAT073BIS</b>		<b>SOLVING</b>	<b>BEAM PROBLEM</b>	<b>SOL.SAR.STAT073BIS</b>
<b>FINITE ELEMENT</b>			<b>SOLVER</b>	<b>CLEVER (SARGON ©)</b>

<b>GEOMETRY &amp; CONSTRAINTS</b>					
Full Length [mm]		Full Height [mm]		Dx1 [mm]	Constraints
3000		4000		1000	- As shown
<b>LOAD</b>					
Type		Value		Point of application	
force concentrated		7.000e+003		Dx1	
				-	
				-	
				-	
<b>MATERIAL</b>					
$f_y$ [N/mm <sup>2</sup> ]		$f_u$ [N/mm <sup>2</sup> ]	E [N/mm <sup>2</sup> ]	$\nu$	$\alpha$
2.350e+002		3.600e+002	2.060e+005	3.000e-001	1.200e-005
<b>CROSS-SECTION</b>					
A [mm <sup>2</sup> ]		J <sub>2</sub> [mm <sup>4</sup> ]	J <sub>3</sub> [mm <sup>4</sup> ]	J <sub>1</sub> [mm <sup>4</sup> ]	W <sub>2</sub> [mm <sup>3</sup> ]
1.000e+000		1.000e+000	1.000e+000	1.000e+000	1.000e+000
W <sub>pl2</sub> [mm <sup>3</sup> ]		W <sub>pl3</sub> [mm <sup>3</sup> ]	i <sub>2</sub> [mm]	i <sub>3</sub> [mm]	i <sub>t</sub> [mm]
1.000e+000		1.000e+000	1.000e+000	1.000e+000	1.000e+000
<b>OTHER DATA</b>					
<b>TARGET VALUES</b>			<b>COMPUTED VALUES</b>		
Description			T <sub>v</sub>	T <sub>vk</sub>	C <sub>v</sub>
Shear T3, I extreme. Beam # 1. Load case # 1			-3.0882e+002	Th	-3.0882e+002
Shear T3, I extreme. Beam # 2. Load case # 1			3.0882e+002	Th	3.0882e+002
Bending M2, I extreme. Beam # 3. Load case # 1			-1.2353e+006	Th	-1.2353e+006
Bending M2, I extreme. Beam # 2. Load case # 1			0.0000e+000	Th	0.0000e+000

Cv                    computed value  
 Tv                    target value  
 T<sub>vk</sub>                target value kind (theoretical, cross check, accepted).  
     Th                theoretical value  
     Cr                cross check value (theoretical target value is not known, results obtained with a different program are used as target values).  
     Ac                accepted value (a value which, on the basis of some argument, can be considered acceptable).

100(T<sub>v</sub> - Cv) / Cv    relative error percentage

Computational notes:

**Authors:** Ing. Marco Croci, Ing. Paolo Rugarli  
**Computed errors:** checksolvers.exe, by Castalia srl.

